

PRESIDENT

is powered with a batterie 12 or 24 V

HENRY ASC

12/24 V

Classic



Classic, Compact, Complete !


Groupe
PRESIDENT
ELECTRONICS

— since 1978
S.A. Capital 10.000.000 €
Siège Social / Head Office – France – Route de Sète – BP 100
34540 BALARUC
Site Internet : <http://www.president-electronics.com>
e-mail : groupe@president-electronics.com

1628/03-15 C0347



*See warranty conditions on our website: www.president-electronics.com

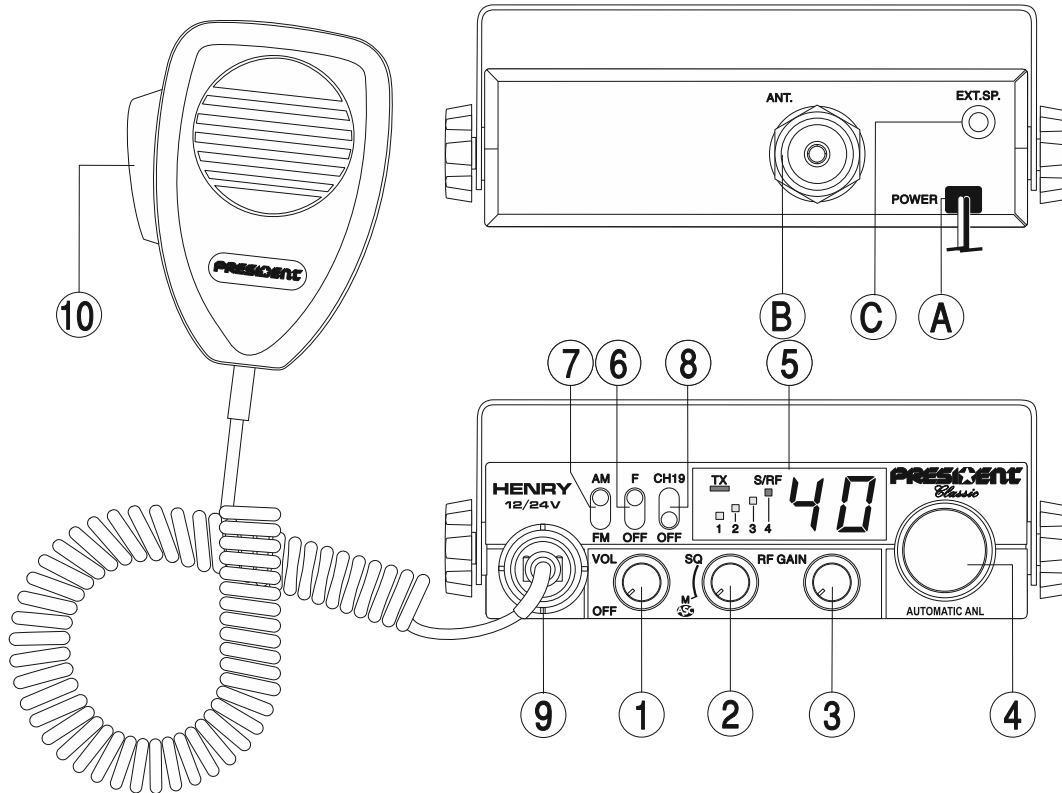

- | | |
|--|--|
| 1) ON/OFF – VOLUME | 8) CH 19 |
| 2) ASC (Automatic Squelch Control) / SQUELCH | 9) 6-PIN MICROPHONE PLUG |
| 3) RF GAIN | 10) PTT (push to talk)
TOT (Time Out Timer) |
| 4) CHANNEL SELECTOR ROTARY KNOB | A) DC-POWER TERMINAL (13,2 V) / 24 V |
| 5) DISPLAY | B) ANTENNA CONNECTOR (SO-239) |
| 6) F - FREQUENCY BAND SELECTION | C) EXTERNAL SPEAKER JACK (8 Û, Ø 3,5 mm) |
| 7) MODE | |

1629/03-15 C047b

1) GENERAL

- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V / 24 V
- Dimensions (in mm) : 115 (L) x 180 (H) x 35 (D)
- Weight : 0,8 kg
- Accessories supplied : Electret microphone with support, mounting cradle, screws.
- Filter : ANL (Automatic Noise Limiter) built-in

2) TRANSMISSION

- Frequency allowance : +/- 300 Hz
- Carrier power : 4 W AM / 4 W FM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz in AM/FM
- Emitted power in the adj. channel : inferior to 20 µW
- Microphone sensitivity : 10 mV
- Drain : 1,7 A (with modulation)
- Modulated signal distortion : 1,8 %

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 µV - 113 dBm (AM/FM)
- Frequency response : 300 Hz to 3 kHz in AM/FM
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 5 W
- Squelch sensitivity : minimum 0.2 µV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 500 mA nominal
800 mA maximum

Specifications

is powered with a batterie 12 or 24 V



all european standards

