


MB3712 transistor replacement with new low frequency Amplifier Reb. Ass'y

1. Remove 2 x MB3712
2. Drill the heatsink and screw the Reb. Ass'y t/w the wedge.
3. Connect the Reb. Ass'y and apply modifications as following:



- 1 - WHITE
- 2 - BLACK
- 3 - RED
- 4 - GREY
- 5 - VIOLET
- 6 - BROWN

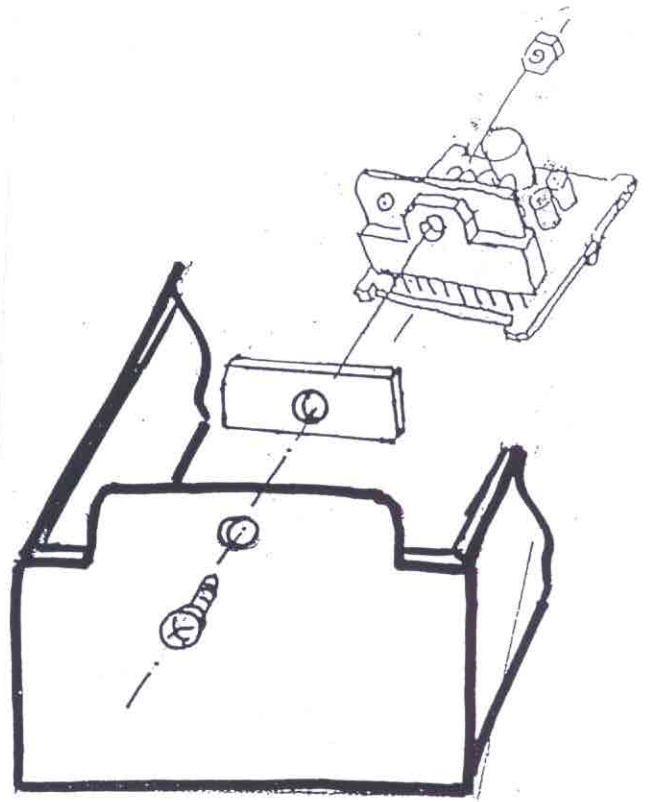