



SYNOPTIQUE

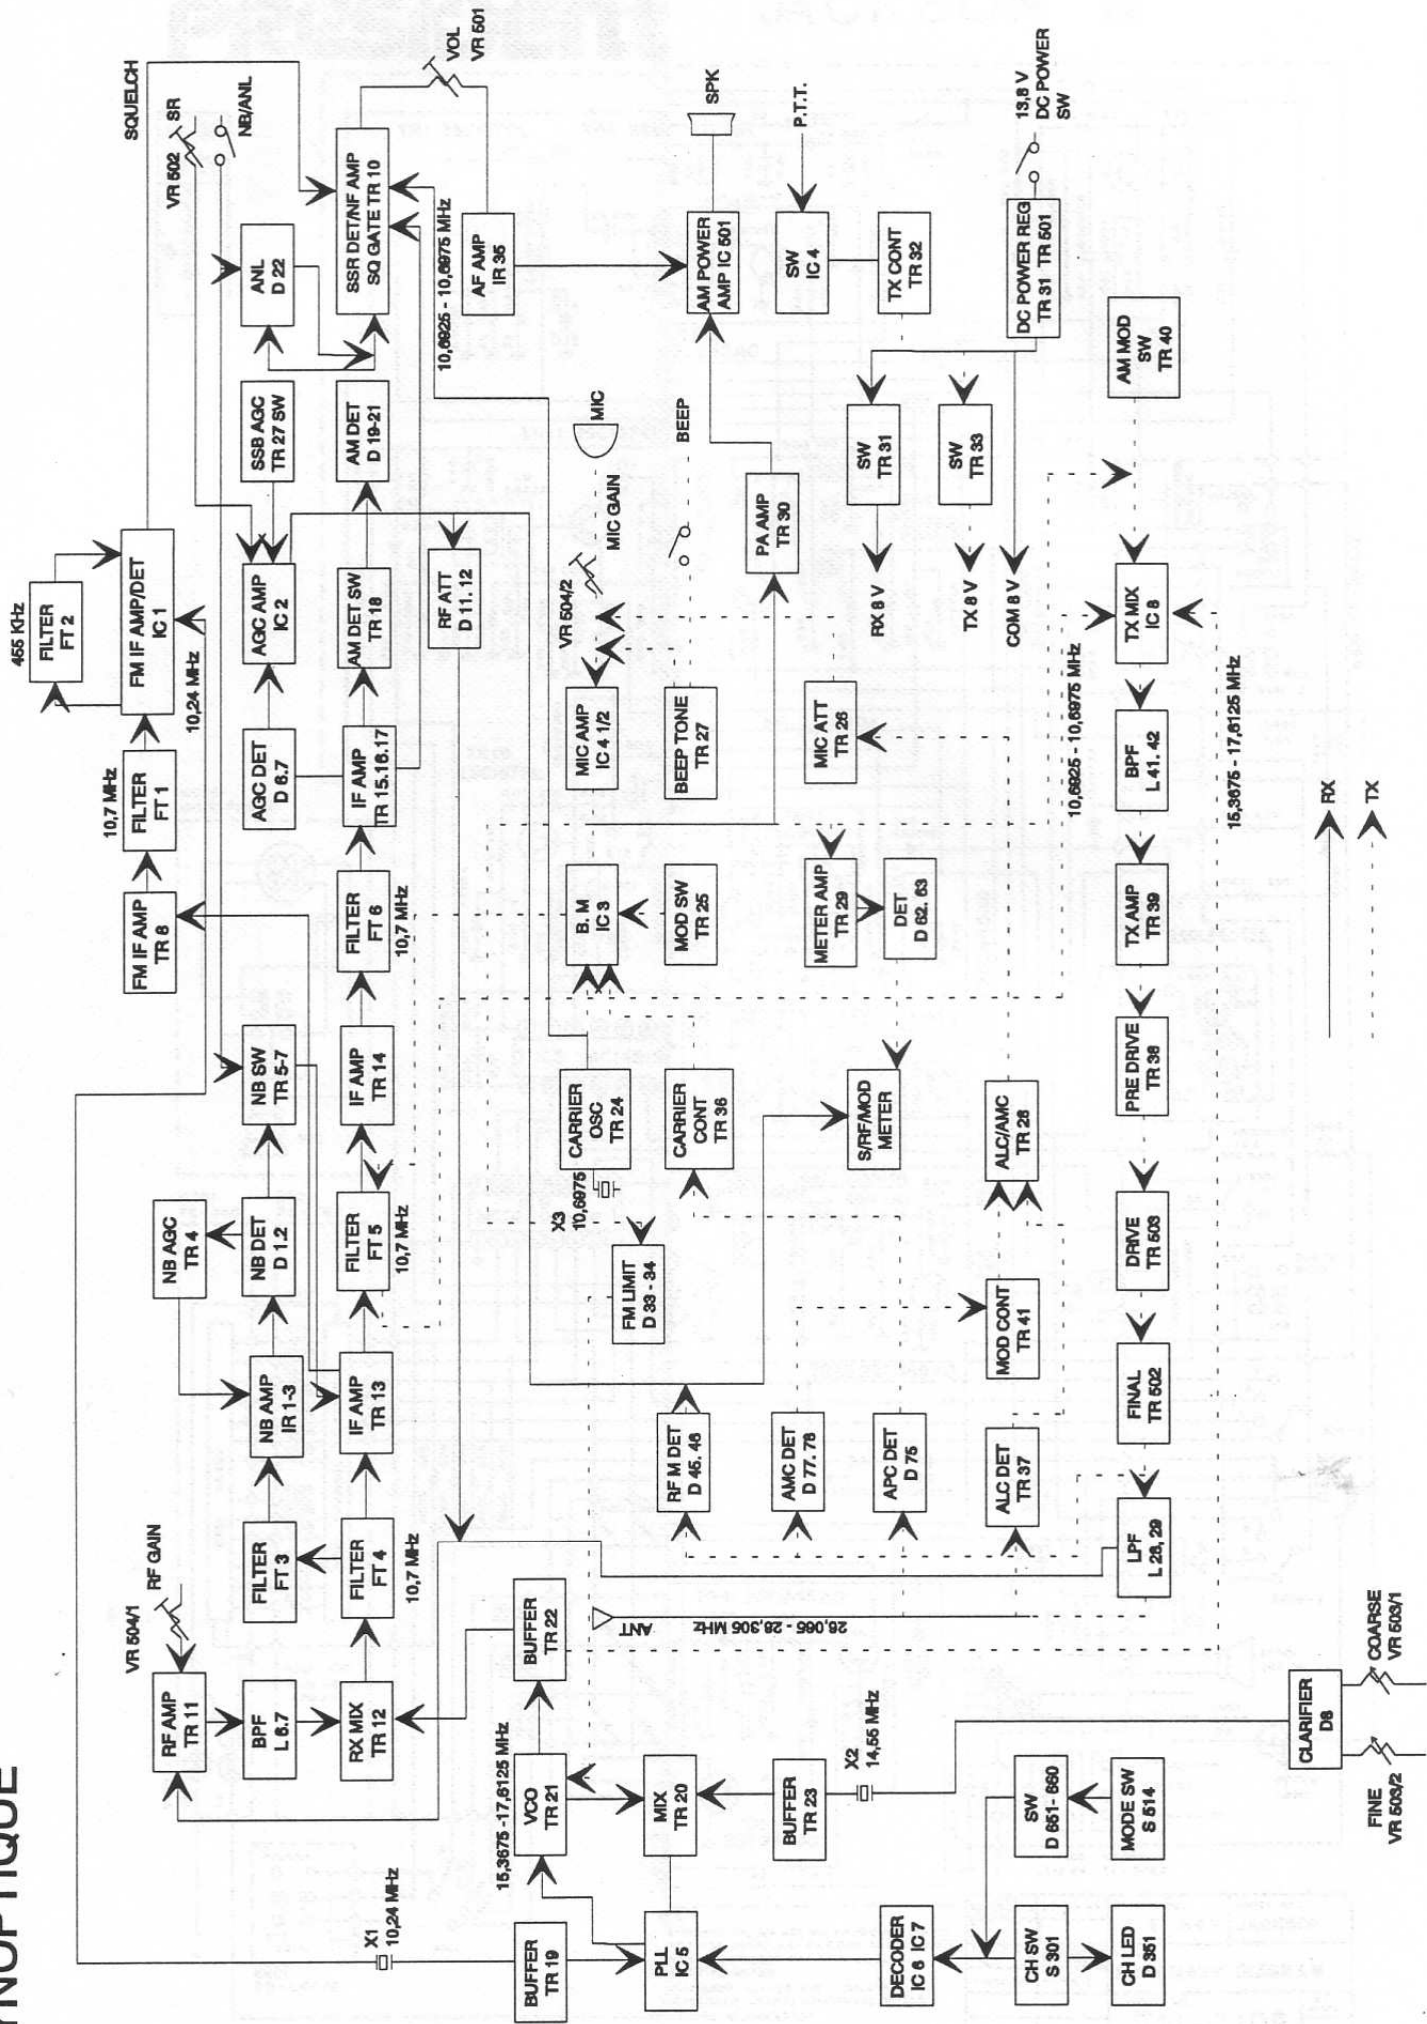


PRESIDENT

共用
使用
WT-5A7A, B, C

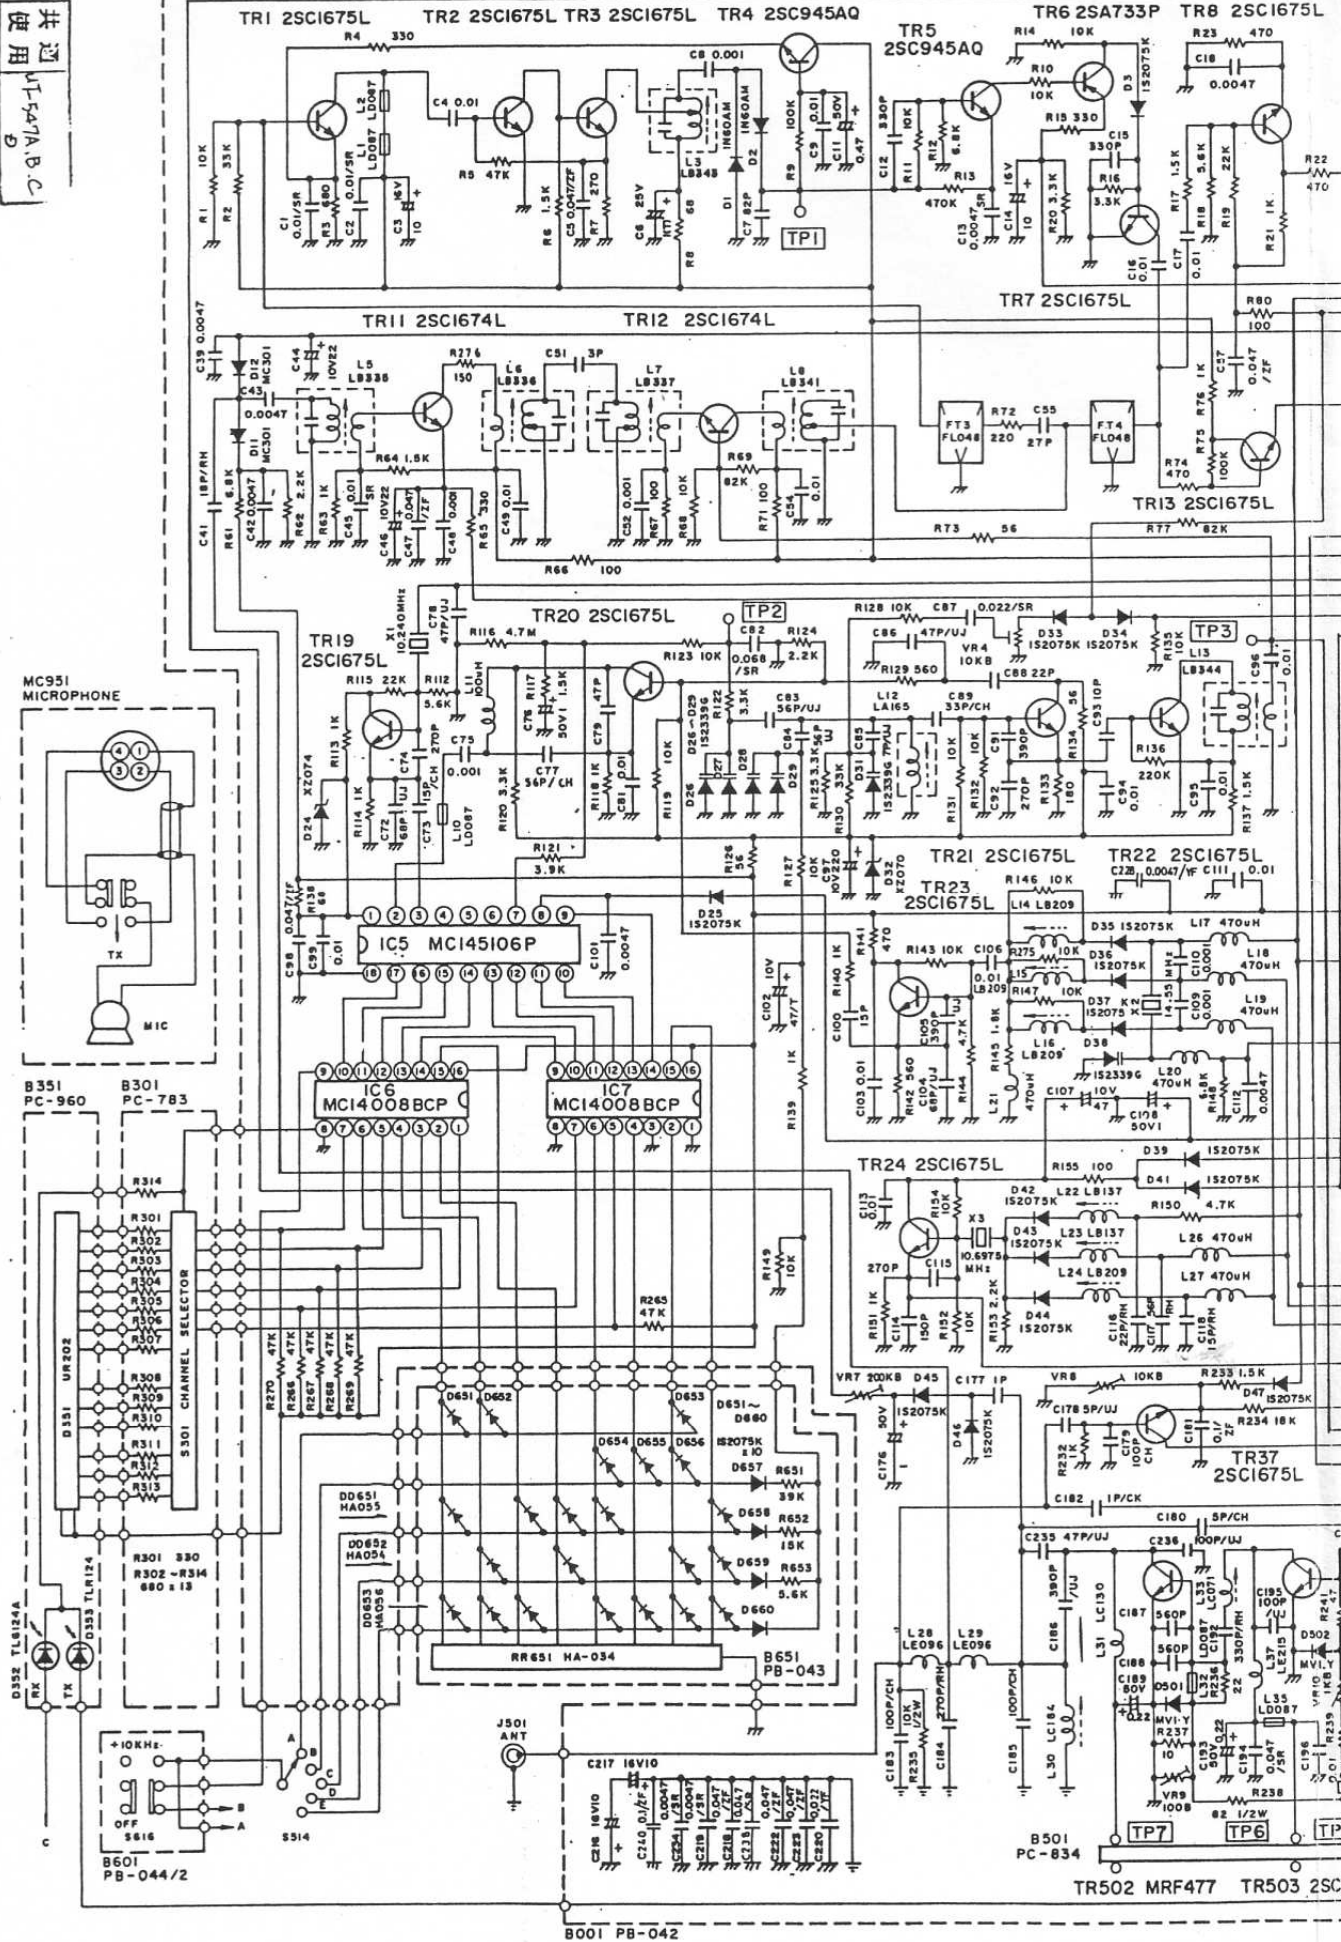

TR502 MRF477 TR503 2SC


BOO1 PB-042

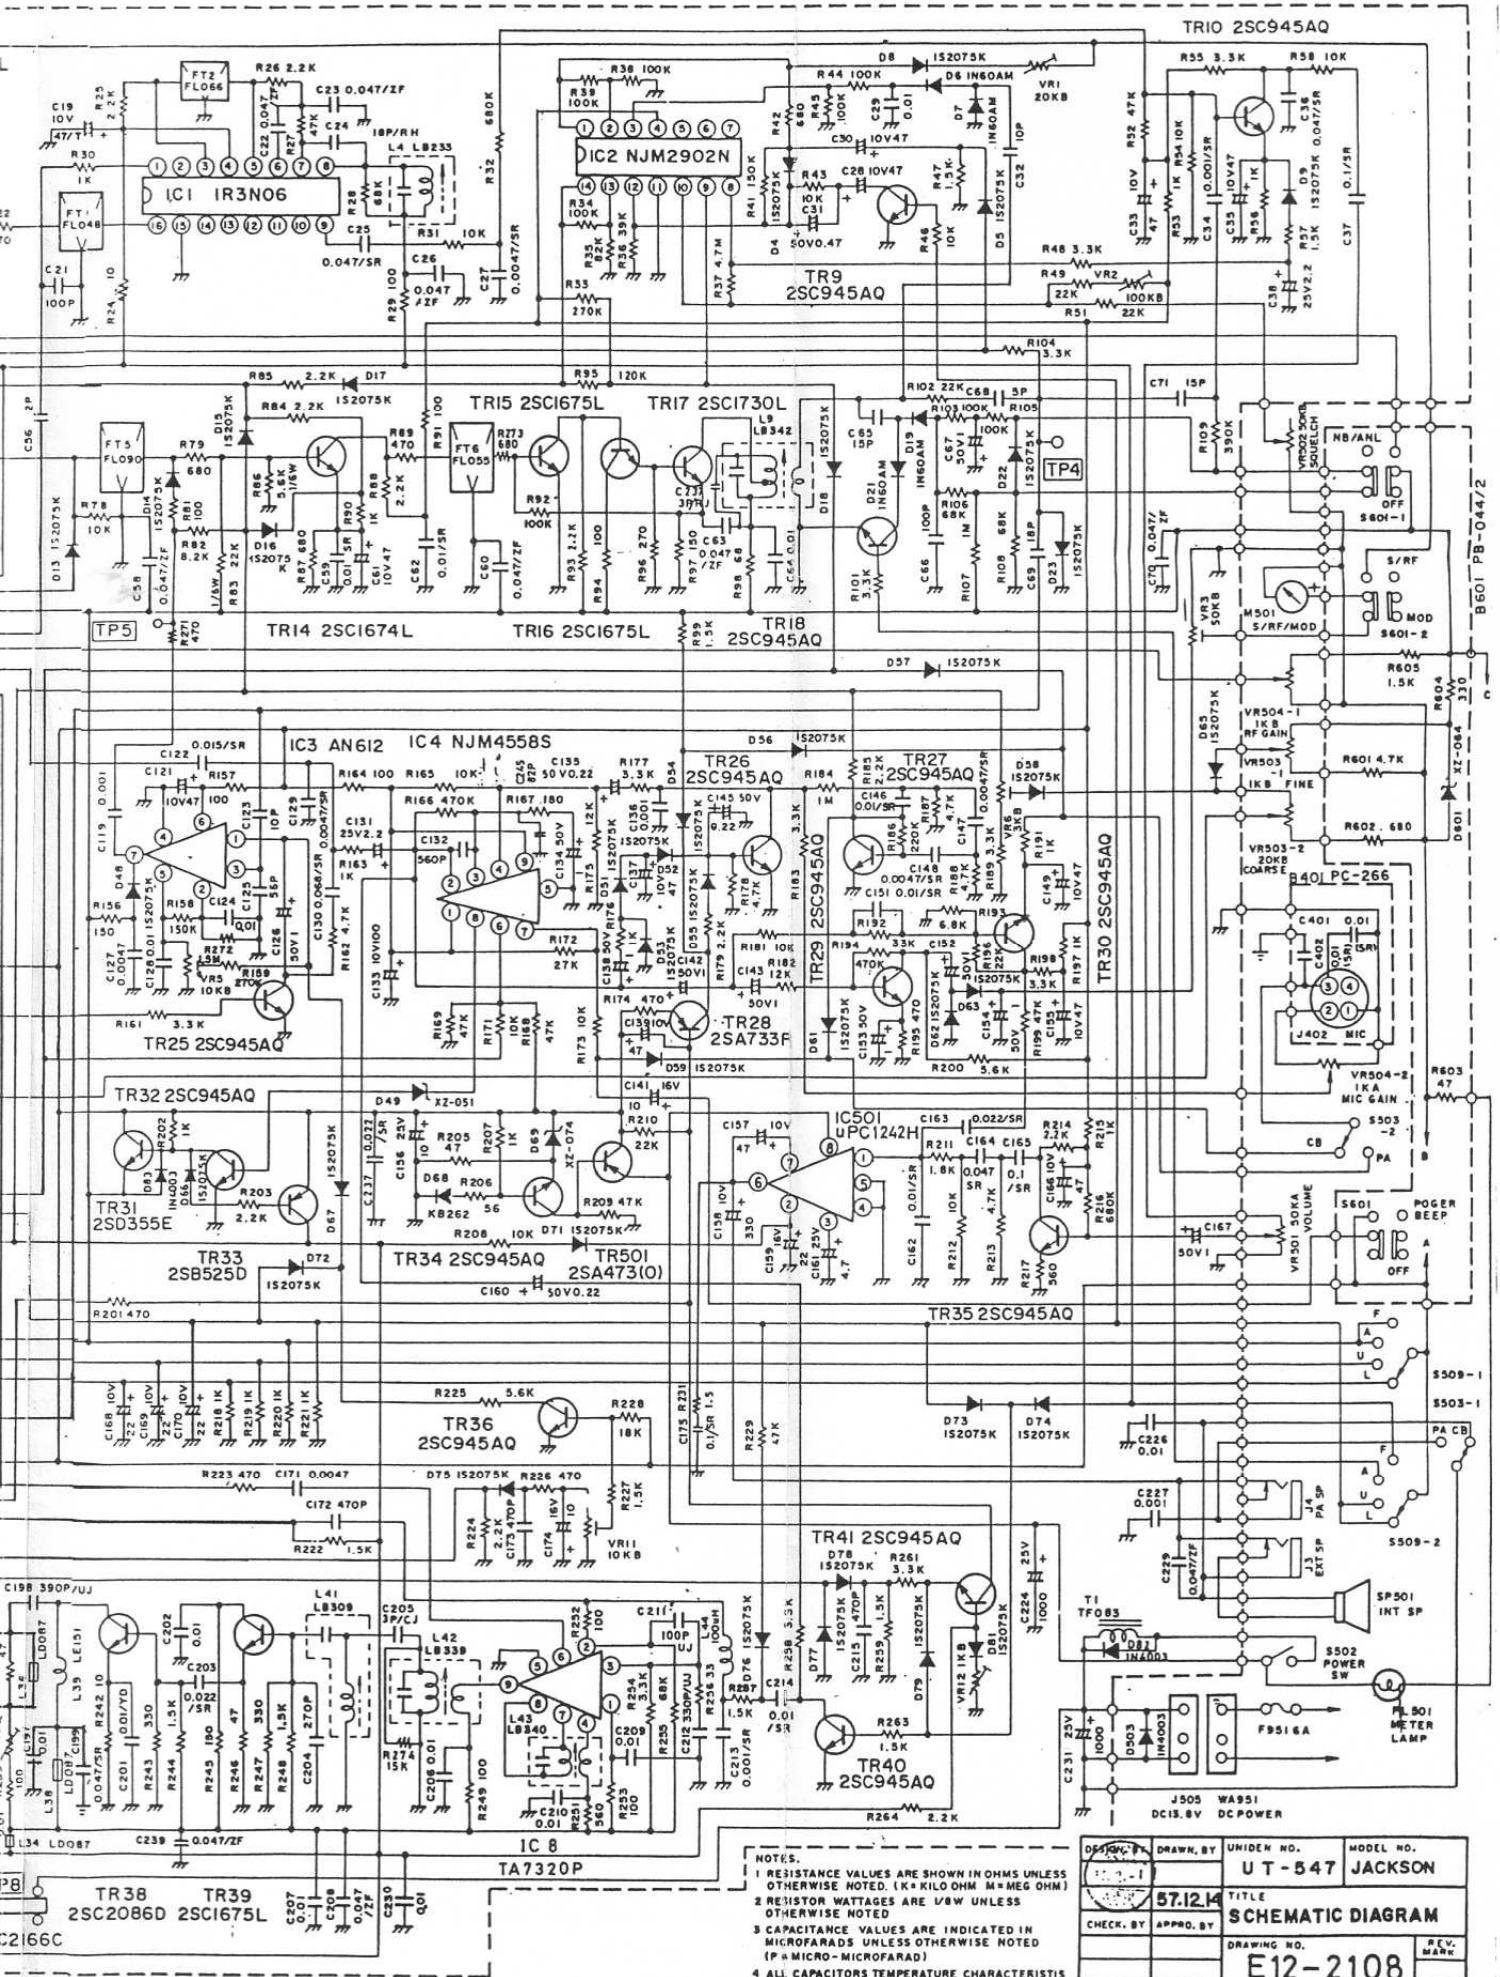


NOTES:
 1 RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K = KILO OHM M = MEG OHM)
 2 RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED
 3 CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P = MICRO-MICROFARAD)
 4 ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5L (LESS THAN 100PPF) OR YF (MORE THAN 100PPF) UNLESS OTHERWISE NOTED.

DESIGNED BY	UNIDEN NO.	MODEL NO.
DRAWN BY	U T - 547	JACKSON
CHECK BY	57.12.14	TITLE
APPRO. BY		SCHEMATIC DIAGRAM
		DRAWING NO.
		E12-2108
		REV. MARK

UNIDEN CORP.

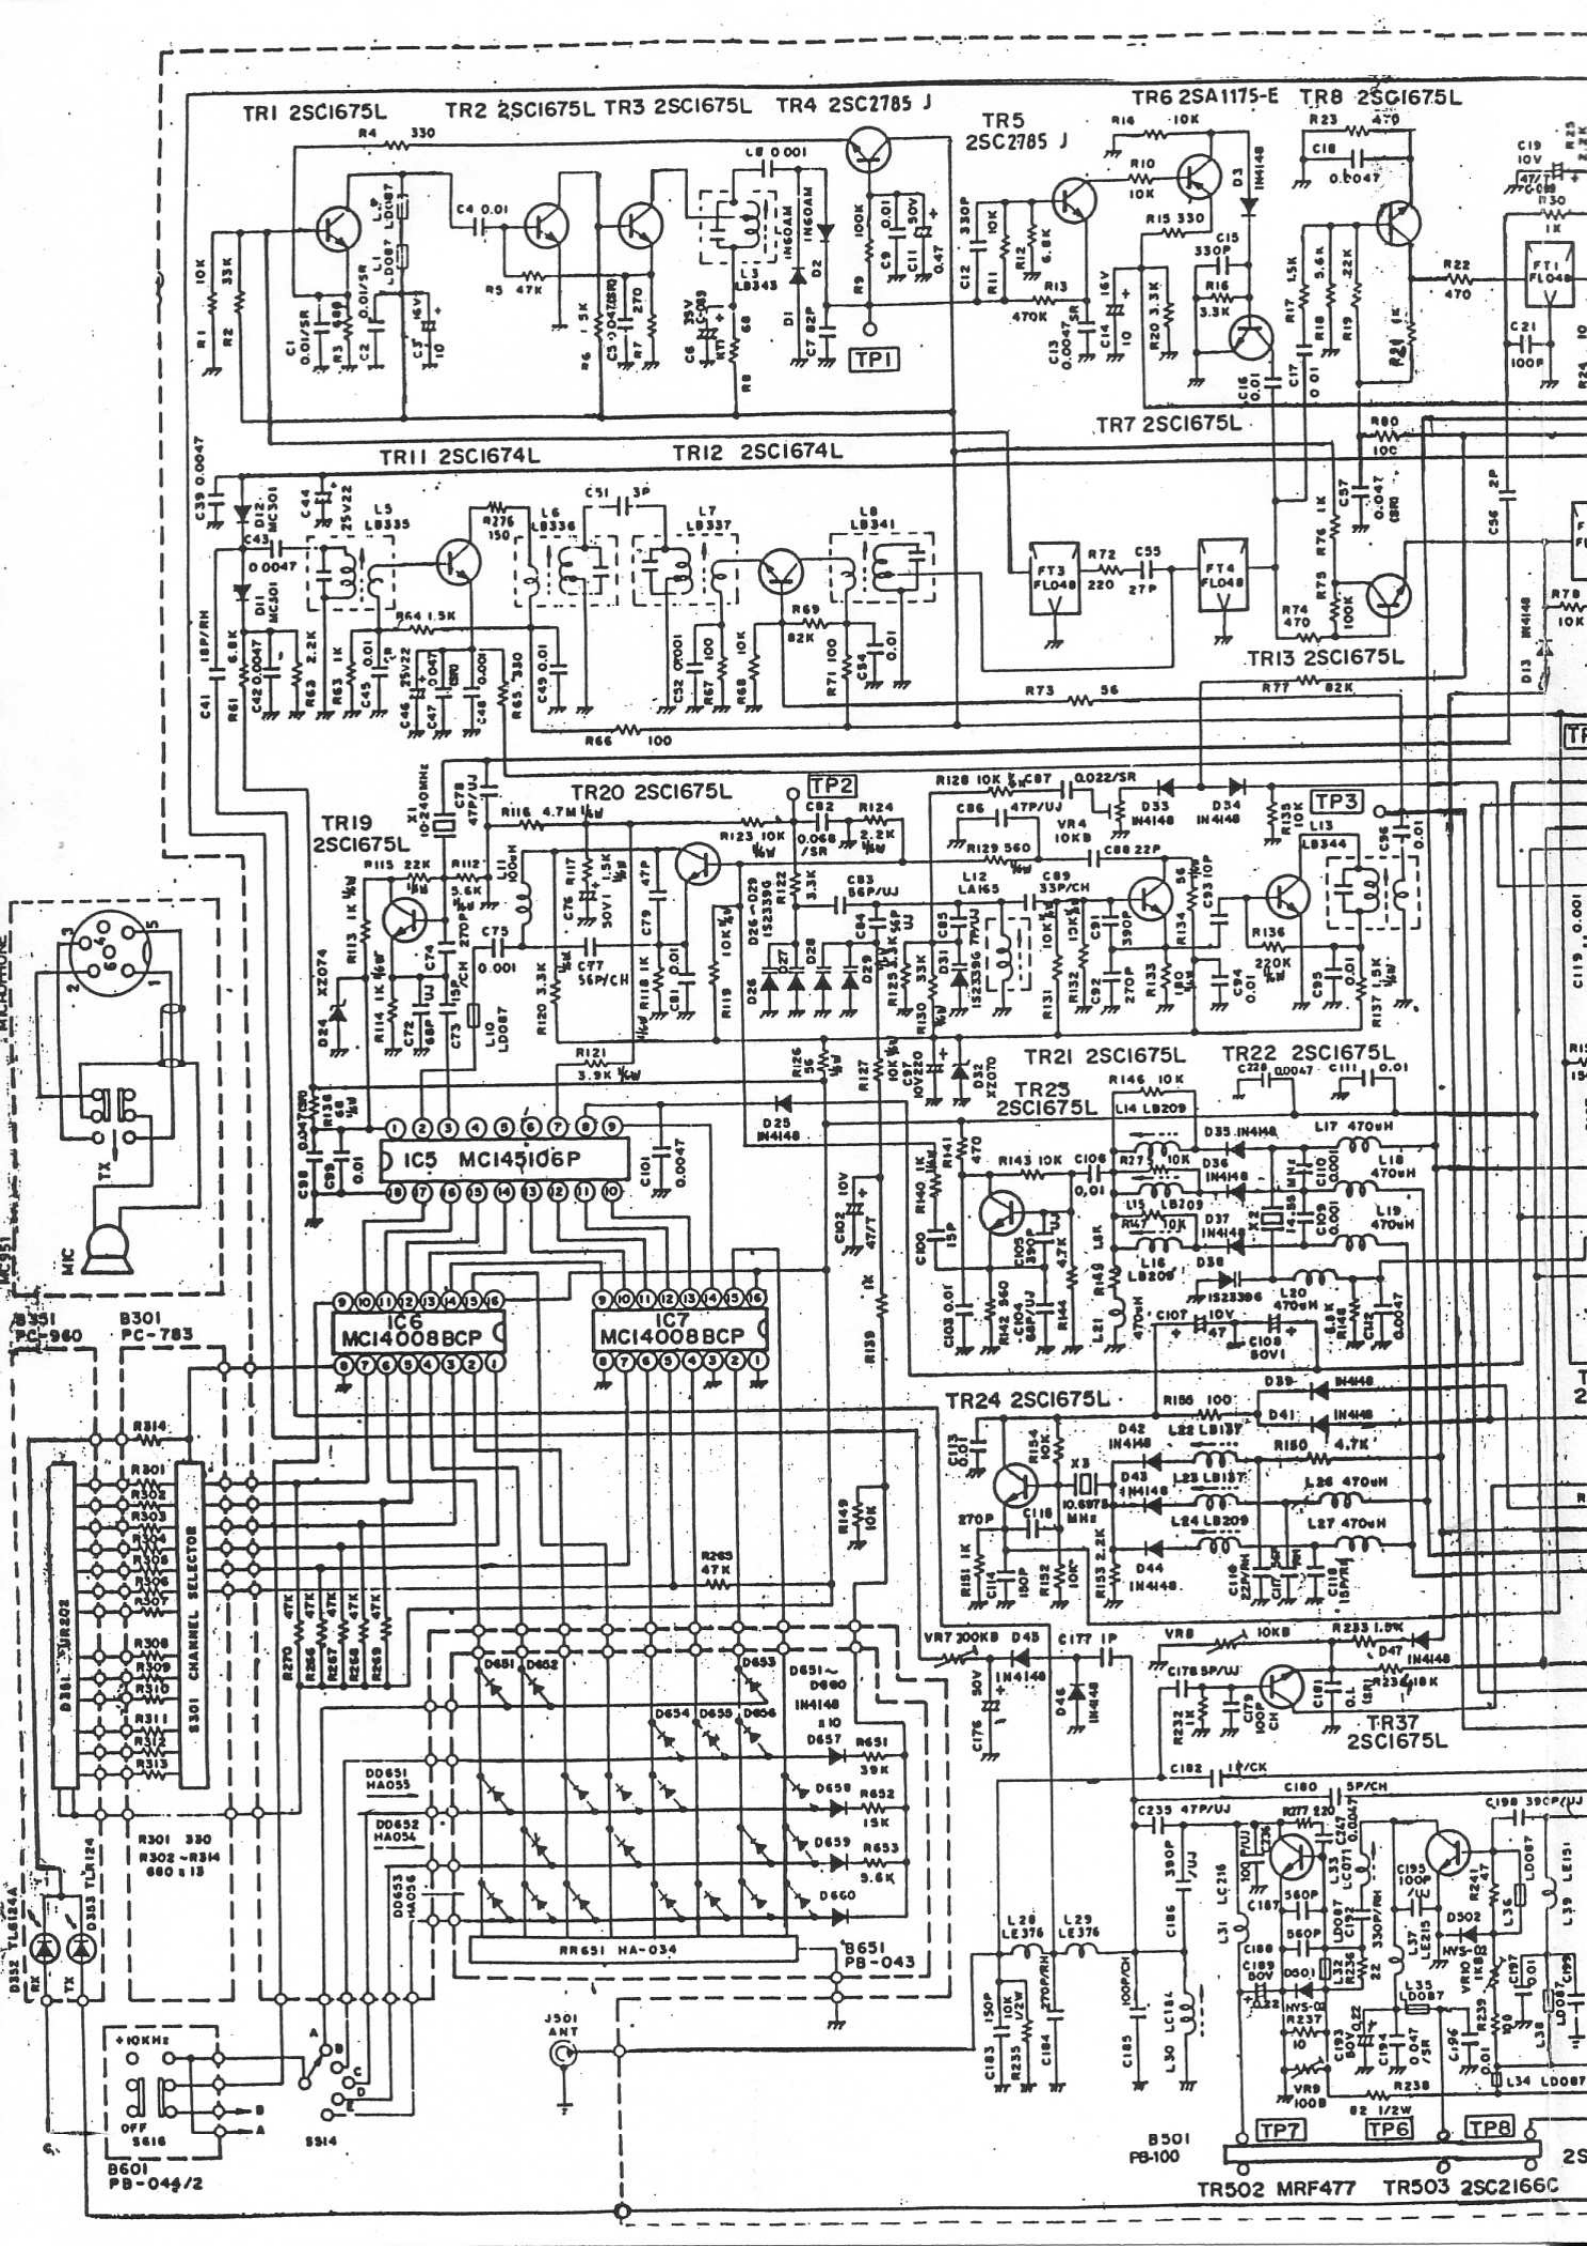

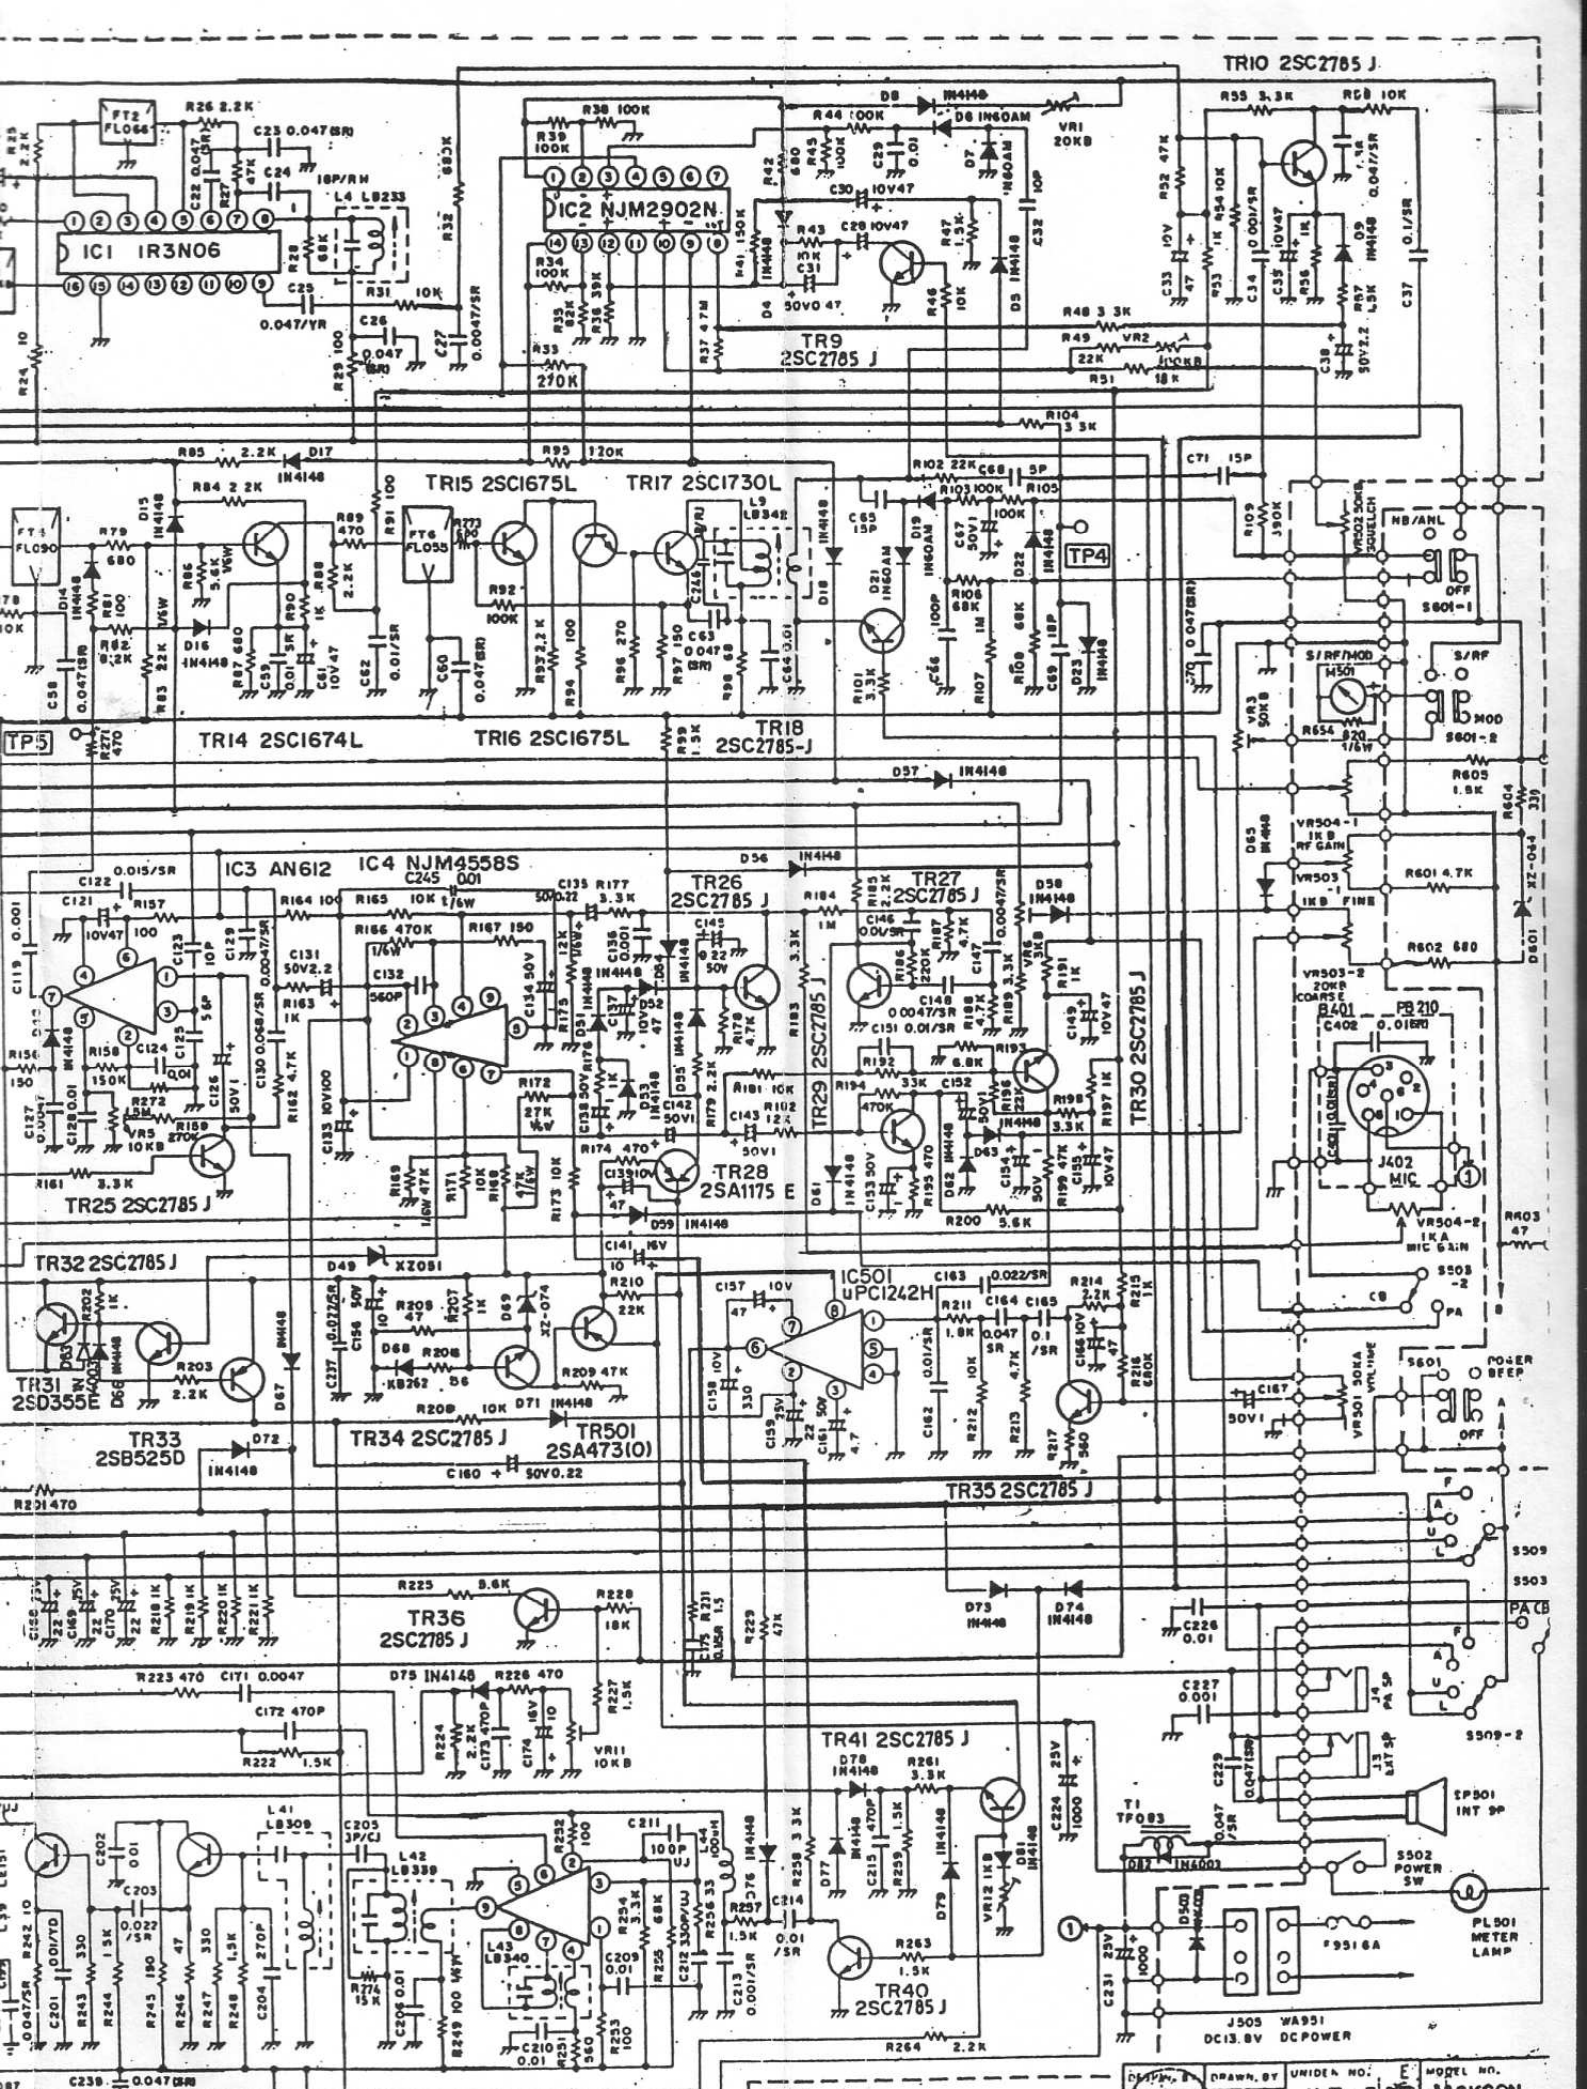

NOTES.
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K = KILO OHM M = MEG OHM)
 2. RESISTOR WATTAGES ARE 1/4W UNLESS OTHERWISE NOTED
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P = MICRO-MICROFARAD)

DESIGNED BY	DRAWN BY	UNIDEN NO.	MODEL NO.
REVISED BY	DATE	UT-547	JACKSON
CHECKED BY	APPROVED BY	SCHEMATIC DIAGRAM	
DATE	DRAWING NO.	ES2-0151	

TR38 2SC2086D TR39 2SC1675L

IC8 TA7320P