


PB042

- VR1-S/Meter
- VR2-Sq range
- VR3-Mod Meter
- VR4-FM Dev.
- VR5-Car. Bal.
- VR6-TX Freq.
- VR7-RF Meter
- VR8-ALC
- VR9-Final Bias
- VR10-Driver Bias
- VR11-AM PWR
- VR12-AMC

- 1 = GND.
- 2 = AUDIO
- 3 = TX
- 4 = RX

MC951 MICROPHONE



B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

MC145106P MC14008BCP MC14008BCP


MC951 MICROPHONE

B331 PC-960 B301 PC-783


MC145106P MC14008BCP MC14008BCP

MC951 MICROPHONE

B331 PC-960 B301 PC-783

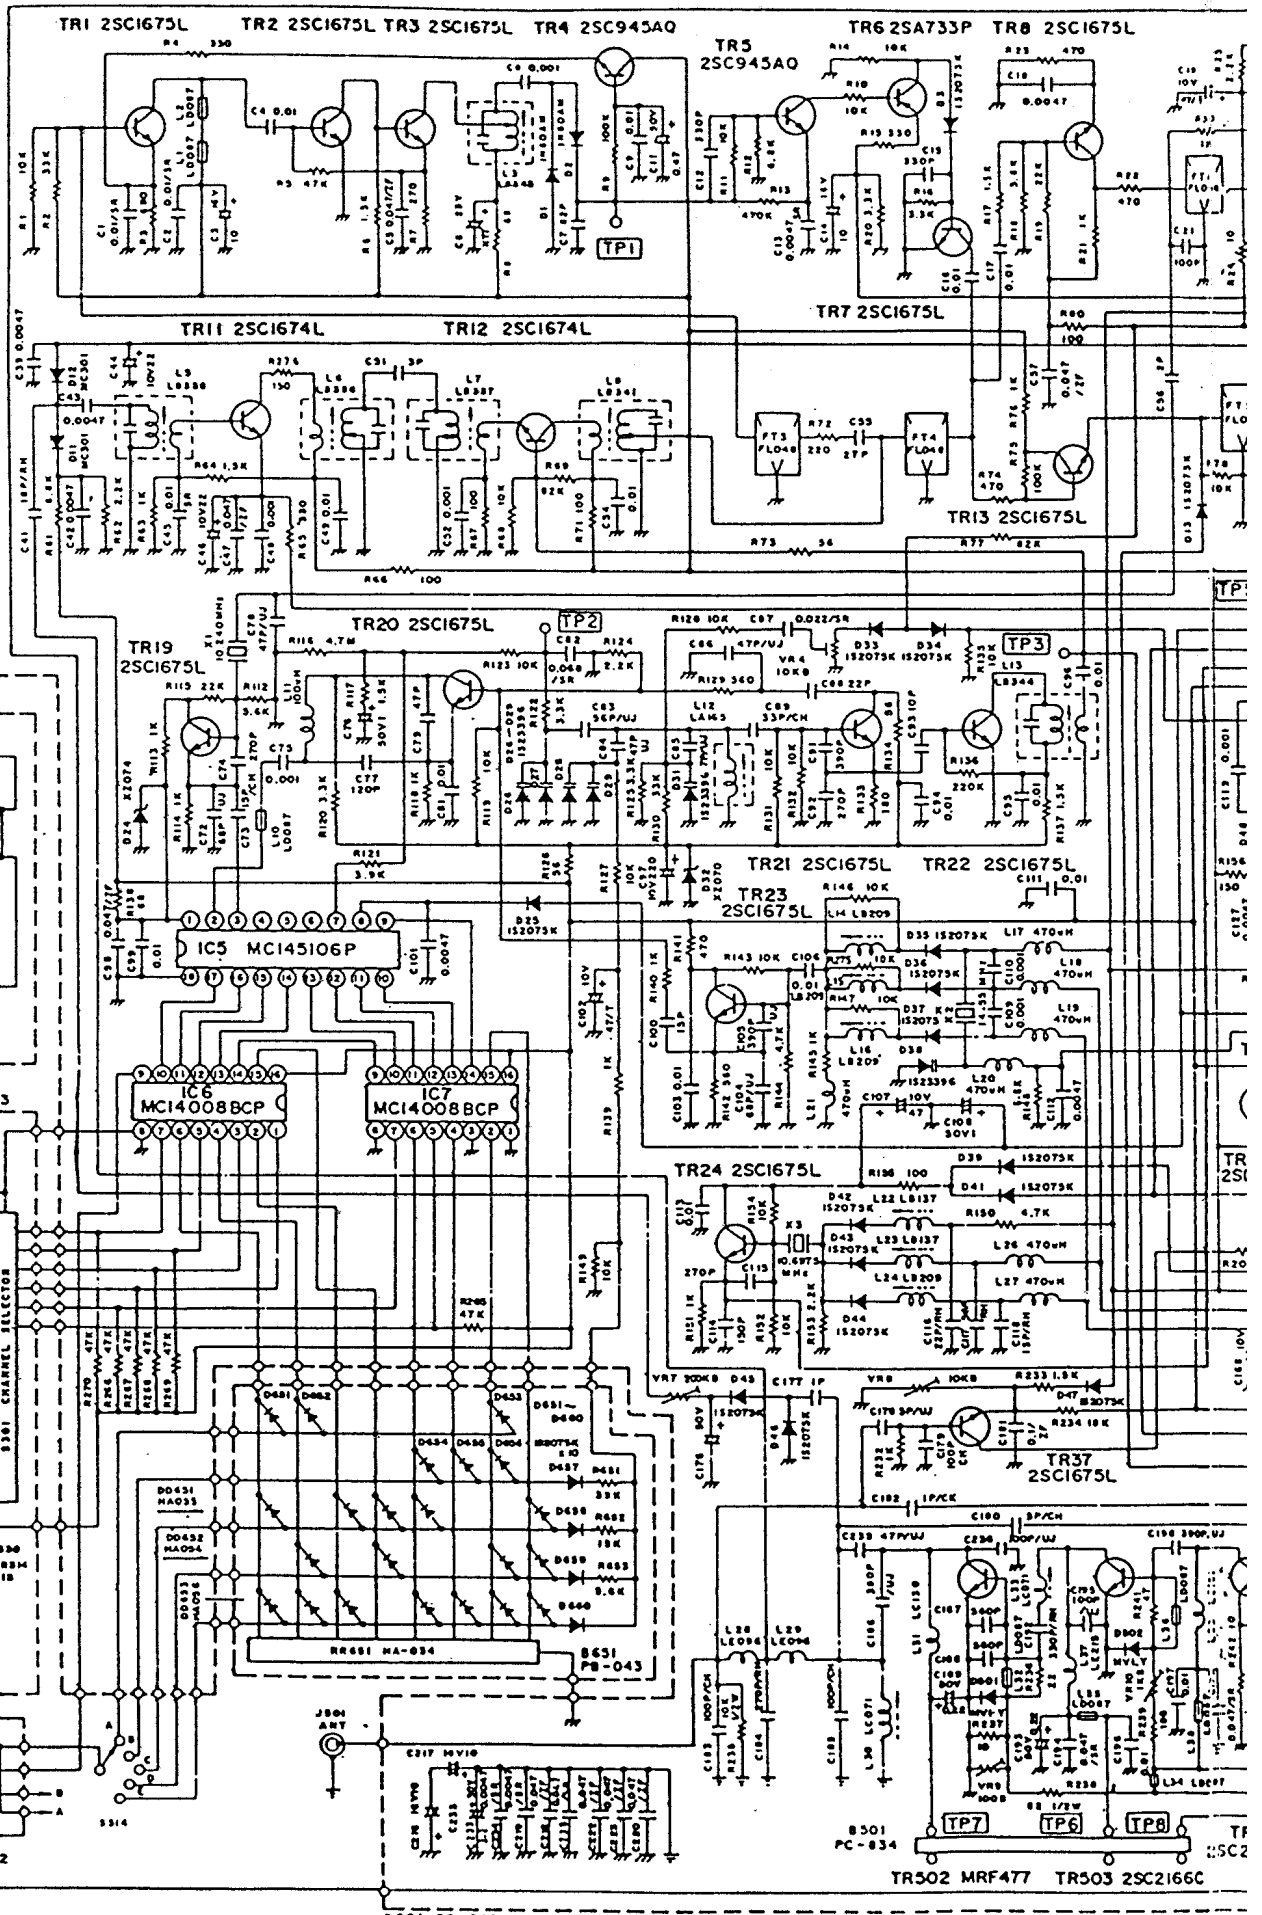

P "JACKSON" (Export Model)

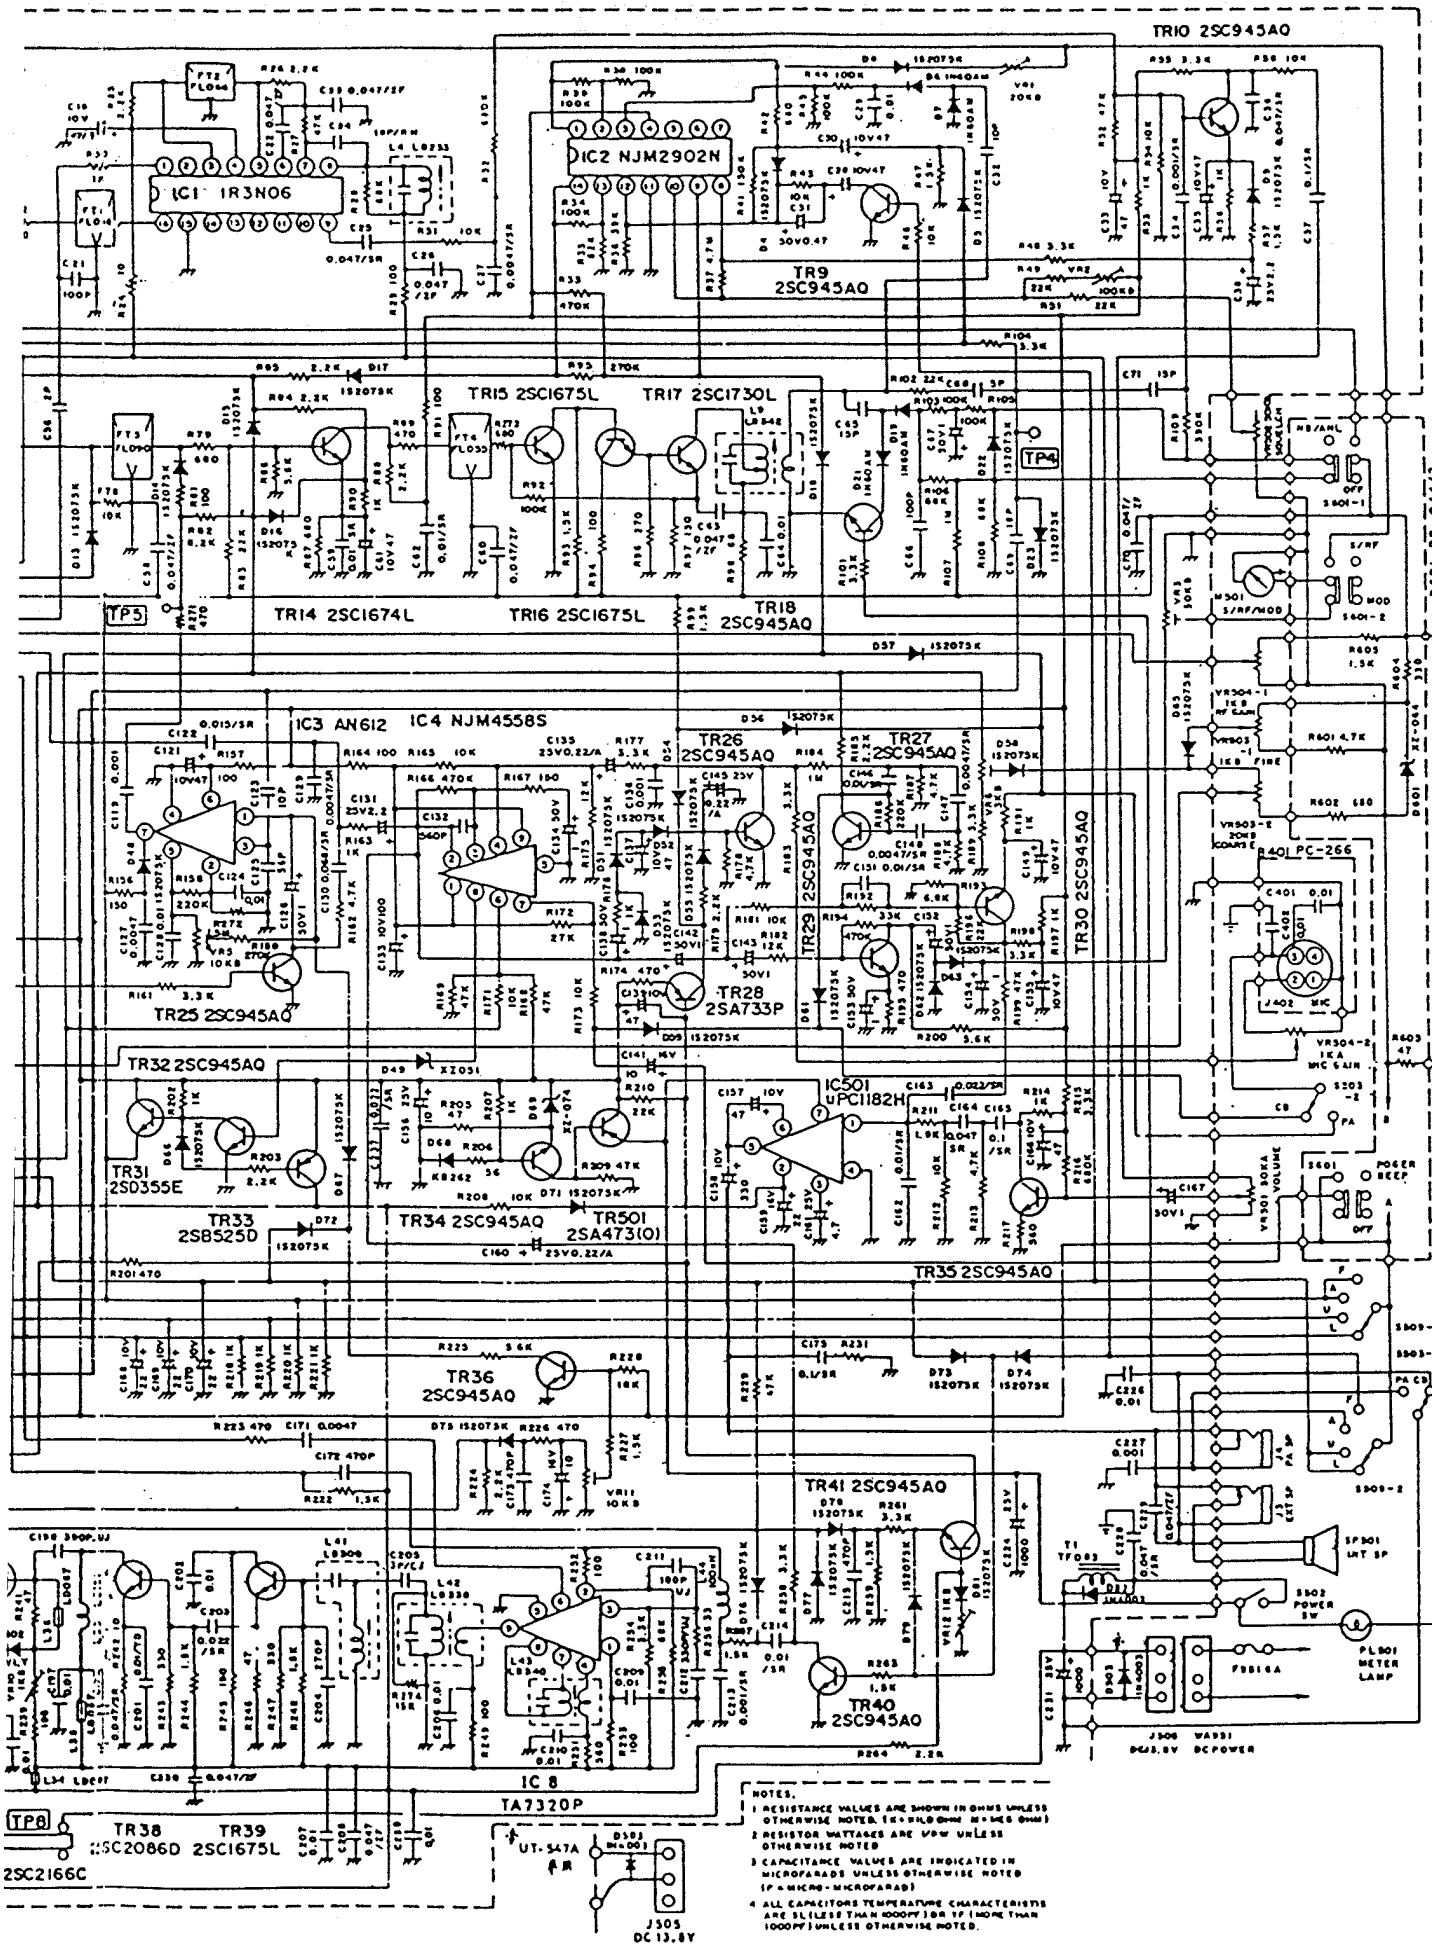

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED (E.G. 500 OHMS = 500 OHMS)
 2. RESISTOR VALUES ARE VOW UNLESS OTHERWISE NOTED
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P = MICRO-MICROFARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% AT 100°C UNLESS OTHERWISE NOTED.

TP8 TR38 TR39
2SC2166C 2SC2086D 2SC1675L

J505
DC 13.8V